
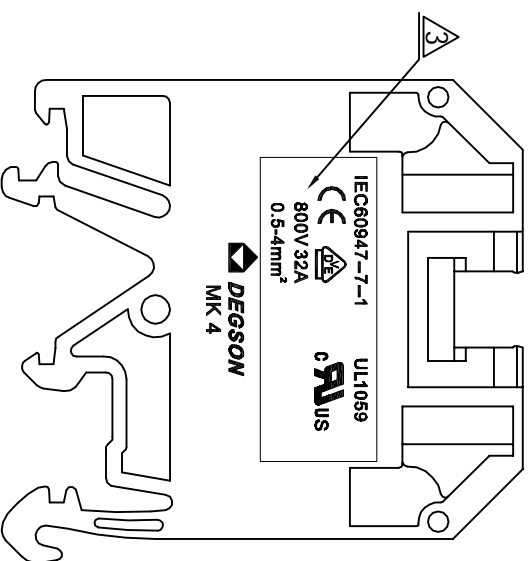
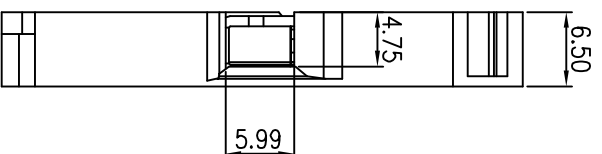
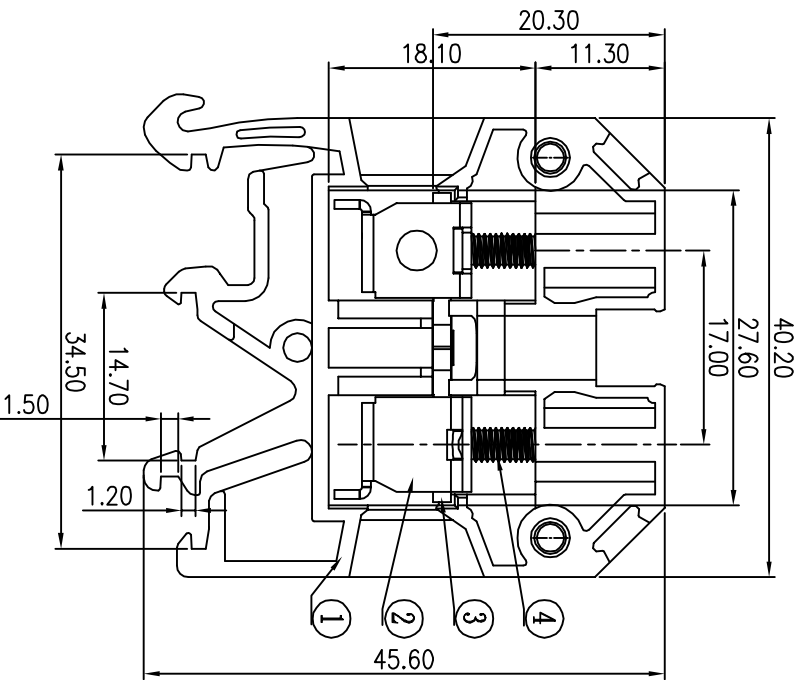


REVISION RECORD				
REV	ECN	DESCRIPTION	DRPT	DATE
1		图面整理	Yqj	11/18/08
2		增加U1刻字	CSX	08/07/07
3		增加U1刻字及参数	ZhangY	07/16/08
4	10-0085	修改方块视图	ZhangY	04/21/10

- Notes:
1. Rated voltage/current:UL 600V/3A
VDE 800V/32A
 3. Operation temperatures: -40°C~+105°C
 4. Withstanding Voltage:AC3000V/1min
 5. Insulation Resistance:5000M Ω /DC1.000V
 6. Wire Range:22~12AWG, 0.5~4mm²
 7. Max. Torque Value:M3.0, 5.1kgf.cm
 8. Undimensioned Tolerances:

Pitch range	in mm	Nominal dimension range	in mm
over	6	over	30
to	10	to	60
to	10	to	100
to	24	to	150
to	30	to	100
to	60	to	150
to	100	to	150
to	150	to	150
to	150	to	150



4	MK4-screw	S000001540 (H)	2	Steel	Cr ³⁺ Zn
3	MK4-contact	6007B0001.0 (H)	1	Brass	Ni plated
2	MK4-Iron cage	X000000640 (H)	2	Iron	Cr ³⁺ Zn

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	MK4 housing	6007A2801A (H)	1	PA66	UL94V-0

DETACHED LISTS	
MM (INCH)	±
0.1	±
0.05	±
0.02	±
0.01	±
ANGLES ± 1°	
FINISH :	G.E. :
SCALE : 1:1	

DATE	CHKD	DATE	DATE	DATE
DATE	DATE	DATE	DATE	DATE
DATE	DATE	DATE	DATE	DATE

NAME	DEGSON	DEGSON ELECTRONICS CO., LTD
MK4-01P-18-01A (H)		
DRAWING NO. MK4-E03		
SIZE A3		
REV 1/10		

DO NOT SCALE DRAWING	SHEET 1	OF 1
----------------------	---------	------