
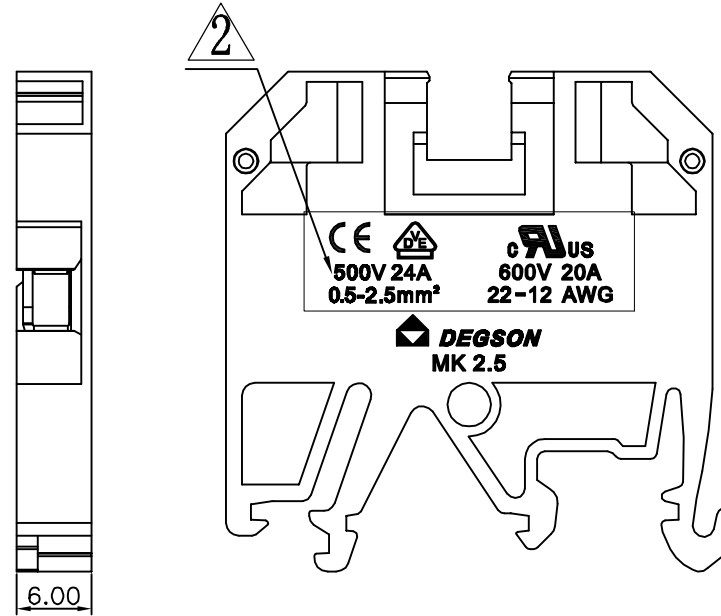


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加UL刻字	CSX	04/06/07*	
△		增加VDE刻字及参数	Zengy	08/22/08*	

Notes:

1. Rated voltage/current:UL 600V/20A
VDE 500V/24A
2. Operation temperatures:-40℃~+105℃
3. Withstanding Voltage:AC3000V/1Min
4. Insulation Resistance:5000MΩ/DC1000V
5. Wire Range:22~12AWG, 0.5~2.5mm²
6. Max. Torque Value:M2.5, 4.08kgf.cm
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	over	to	over	over	over	—	
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	∩ ◇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

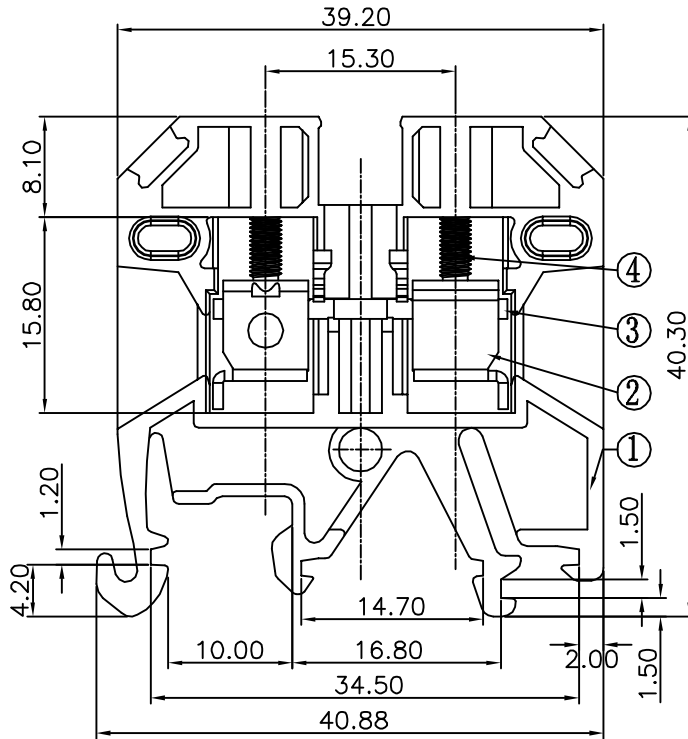

4	MK 2.5-screw	S000000430 (H)	2	Steel	Cr ³⁺ Zn
3	MK 2.5-contact	6017B00010 (H)	1	Brass	Ni plated
2	MK 2.5-Iron cage	X000000510 (H)	2	Iron	Cr ³⁺ Zn

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	MK 2.5-housing	6017A2801A (H)	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)	DFTO WF	DATE 07/26/06*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME MK 2.5-01P-18-01A (H) DRAWING NO. MK 2.5-E03 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
		MFO	DATE	
		APPVL	DATE	
		MATERIAL :		
	ANGLES ± 1°	G.E. :		
	THIRD ANGLE PROJECTION	FINISH :		
		SCALE : 1:1		