
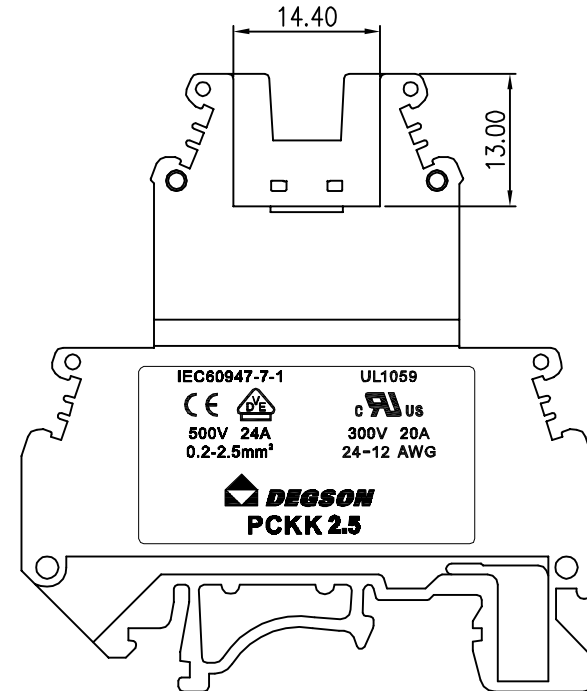


5	PC2.5B-Screw	S000001100 (H)	4	Brass	Ni Plate
4	PCKK2.5-Short Contact	6052B00020 (H)	1	Copper	SnCe Plate
3	PCKK2.5-Long Contact	6052B00010 (H)	1	Copper	SnCe Plate

Notes:

- Rated voltage/current:UL 300V/20A
VDE 500V/24A
- Operation temperatures:-40°C~+105°C
- Withstanding Voltage:AC3000V/1min
- Insulation Resistance:5000MΩ/DC1000V
- Wire Range:24~12AWG, 0.2~2.5mm²
- Max. Torque Value:M3, 5.1kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm										
to	over	to	over	to	over	to	over					
6	6 to 10	10	10 to 24	30	30 to 60	60	60 to 100	100	100 to 150	150	150 to 150	150
±0.10	±0.15	±0.25	±0.2	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/10	±0.05/10	±0.05/10	±0.05/10

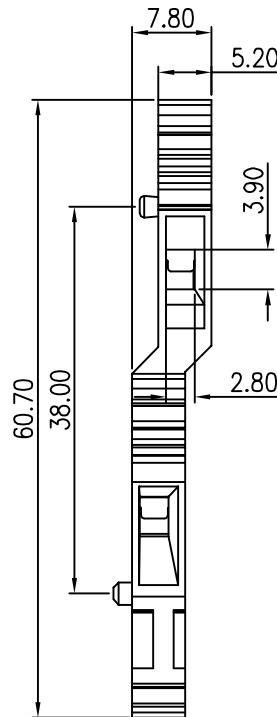

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		增加VDE刻字及参数	Zengy	08/23/08'
△		增加UL刻字及参数	Zengy	03/31/09'
△	10-0009	更正螺丝材质为黄铜	LJH	01/13/10'

2	PC2.5-Brass Cage	X000000880 (H)	4	Brass	Ni Plate
1	PCKK2.5-00A Housing	6052A0Y01A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DF TO LINDA	DATE 01/05/08	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME PCKK2.5-01P-1Y-00A (H) DRAWING NO. PCKK2.5-E01 SIZE A3 REV T3 01/13/10' /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFD	DATE		
	.0 ±	APPVL	DATE		
	.00 ±	MATERIAL			
.000 ±	ANGLES ± 1°	G.E			
	THIRD ANGLE PROJECTION	FINISH:	SCALE: 1:1		