
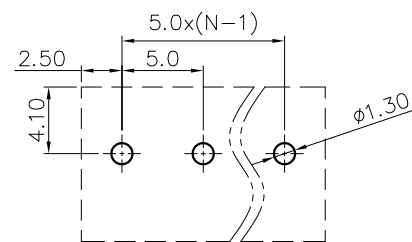
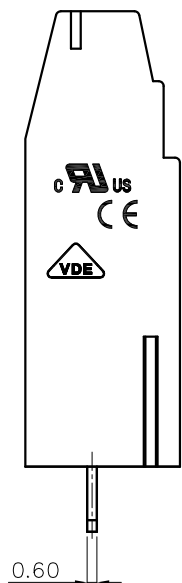
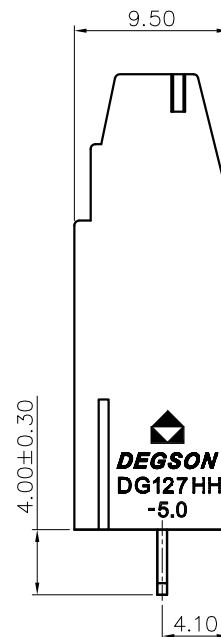
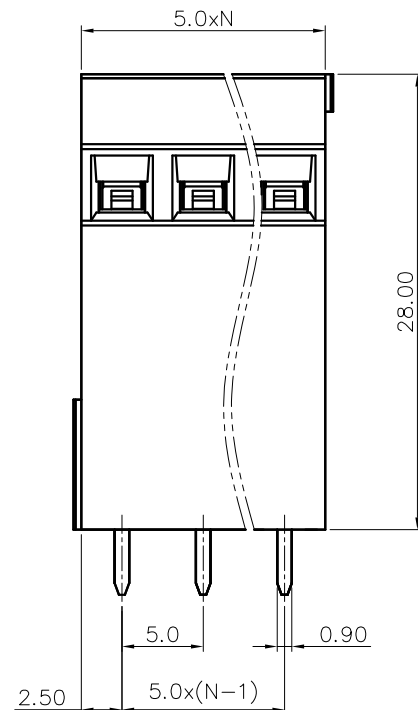


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



PCB LAYOUT

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 12A
- 2.Torque Value : M3 , 02P 3.54Lb.in  
≥03P 4.43Lb.in

3.Wire Range : 26~14AWG

VDE Standard


- 1.Rated Voltage/Current : 250V / 15A
- 2.Torque Value : M3 , 02P 0.4N.m  
≥03P 0.5N.m
- 3.Wire Range : 0.2~1.5mm<sup>2</sup>

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.0mm, Poles : N=02~XXP
- 3.Stripping length : 6-7mm
- 4.Withstanding Voltage : AC2000V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				-	∩	□
TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO	0.1/10	<	
6	10	24	30	60	100	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*	

7.RoHS Compliance

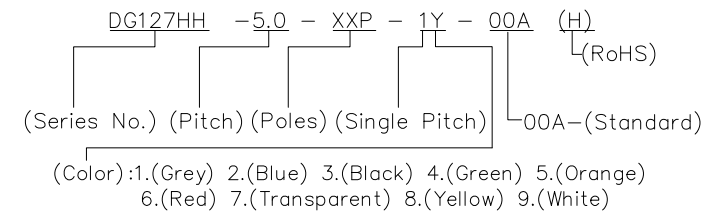

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DG127HH-5.0-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
		DO NOT SCALE DRAWING		SHEET	1/1
		MM (INCH)	SCALE	1:1	