


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



NOTES1:

- UL Standard
- 1. Rated Voltage/Current : 300V / 30A
- 2. Withstanding Voltage : AC1600V/1Min.
- 3. Torque Value : M3.5 ; 7.02Lb.in
- 4. Wire Range : 30~10AWG

IEC Standard

1. Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(KV)	6KV	6KV	6KV
Rate Voltage(V)	1000V	630V	500V
Rate Current(A)	32A		





- 2. Torque Value : M3.5 , 0.8N.m
- 3. Wire Range : 0.2~6mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 6.35mm, Poles : N=4~48P
- 3. Stripping length : 7-8mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm					-	∩	∇
TO	Over	TO	Over	TO	Over	TO	0.1/10		
6	6	10	10	30	30	60			
10	10	24	24	30	60	100			
						150			
						±1.00	±1.30	±2*	

6. RoHS Compliance

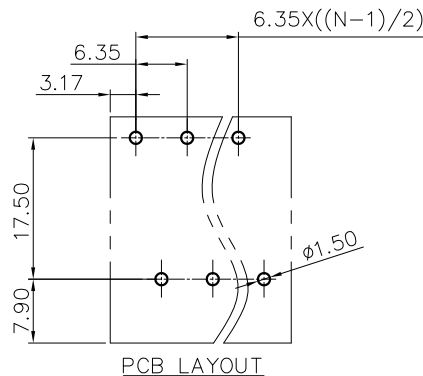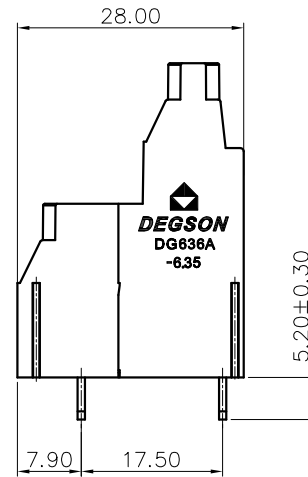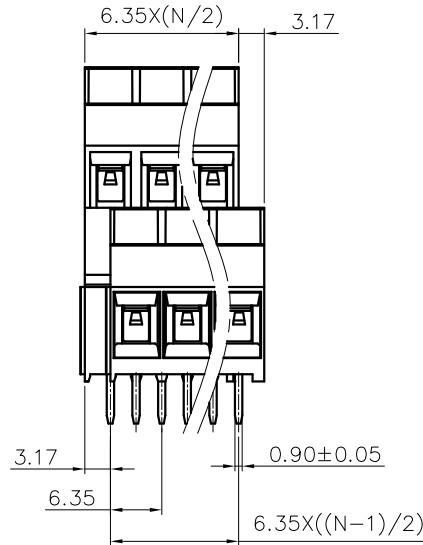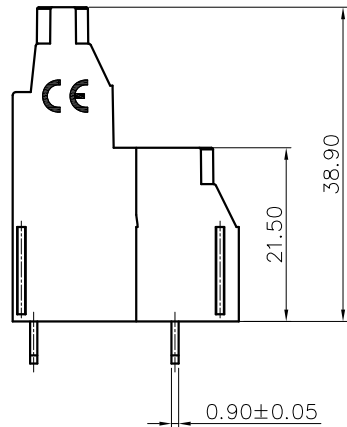

DG636A - 6.35 - XXP - 1Y - 00A (H)
 (RoHS)
 00A-(Standard)
 (Series No.) (Pitch) (Poles) (Single Pitch)
 (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	THIRD ANGLE PROJECTION		DRAWING NO.:		REV
		/		SHEET	1/1
		NAME: NINGBO DEGSON ELECTRICAL CO., LTD		SCALE	1:1
		DG636A-6.35-XXP-1Y-00A(H)			
		TITLE: CUSTOMER DRAWING			
		DO NOT SCALE DRAWING			