

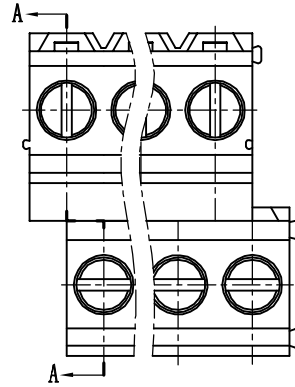
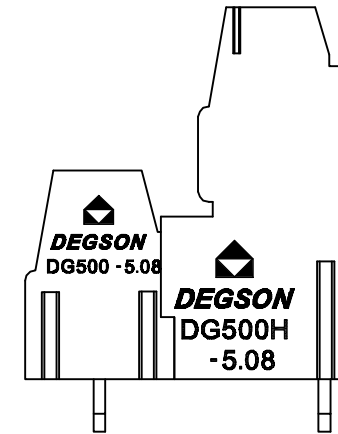
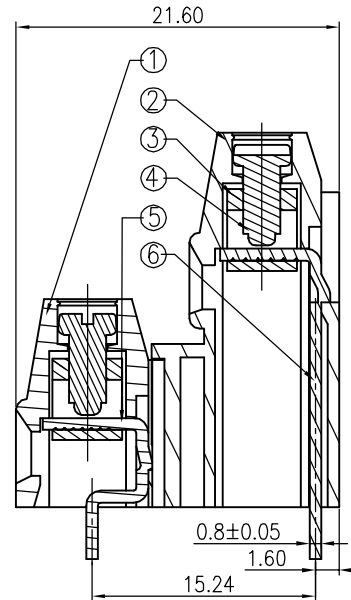


REVISION RECORD					
REV	ECN	DESCRIPTION	DRFT	DATE	
△		Drawing Revise	Haoyh	03/09/06	
△		修改线数: 改为每个焊脚代表一线	LJH	03/22/08	
△	10-0363	修改技术参数	ZXX	10/28/10	

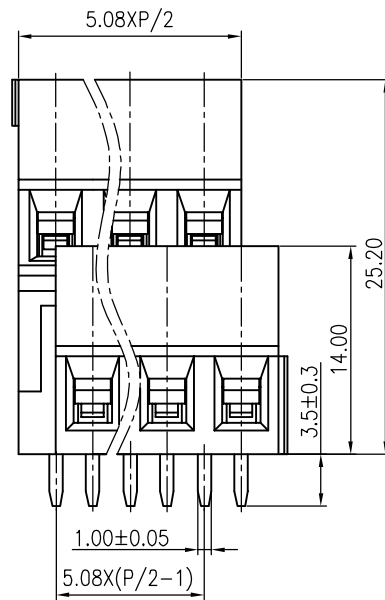

- Notes:
- Pitch: 5.08mm, Ploes: XXP
  - Rated voltage/current: UL 300V/15A △  
VDE 250V/24A
  - Operation temperatures: -40° C ~ +105° C
  - Insulation Withstand Voltage: AC2000V/1Min
  - Insulation Resistance: 5000MΩ/DC1000V
  - Wire Range: 24~12AWG, 2.5mm<sup>2</sup>
  - Max. Torque Value: M2.5, 4.08kgf.cm
  - Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∩ ◇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

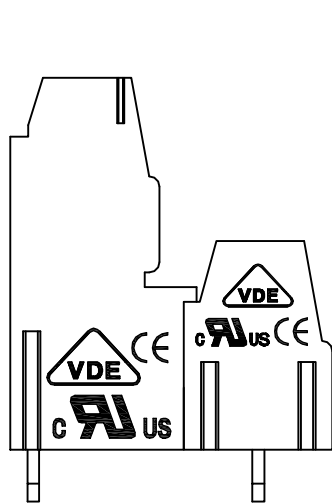

6	DG500H-Pin header	4038B00010 (H) △	XX/2	Brass	SnCe
5	DG128-Pin header	4027B00010 (H) △	XX/2	Brass	SnCe
4	DG128"-Screw	S000001460 (H) △	XX	Steel	Cr <sup>3+</sup> Zn
3	DG128 Brass Cage	X000000020 (H) △	XX	Brass	Ni plated
2	DG500H-5.08-Housing	4038A0Y (XX/2) A (H) △	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG500-5.08-Housing △	4036A0Y (XX/2) A (H)	1	PA66	UL94V-0

(MM INCH) TOLERANCES EXCEPT AS NOTED .0 ± .00 ± .000 ±	DFTO Zhwmm DATE 10/18/05" CHKD DATE MFO DATE APPVL DATE	宁波高正电子有限公司 DEGSON <sup>®</sup> DEGSON ELECTRONICS CO., LTD NAME DG500A-5.08-XXP-1Y-00A(H) DRAWING NO. DG500A-5.08-E01 /PART NO.
ANGLES ± 1° THIRD ANGLE PROJECTION	G.E : FINISH : SCALE : 1:1	DO NOT SCALE DRAWING SHEET 1 OF 1