


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加UL刻字	CSX	08/29/07
△		品名、料号增加环保标示“(H)”	LJH	12/08/07
△		修改线数:改为每个焊脚代表一线	LJH	03/22/08
△		修改参数	Zengy	12/20/08
△	10-0326	增加VDE刻字	Yi. Zeng	09/30/10

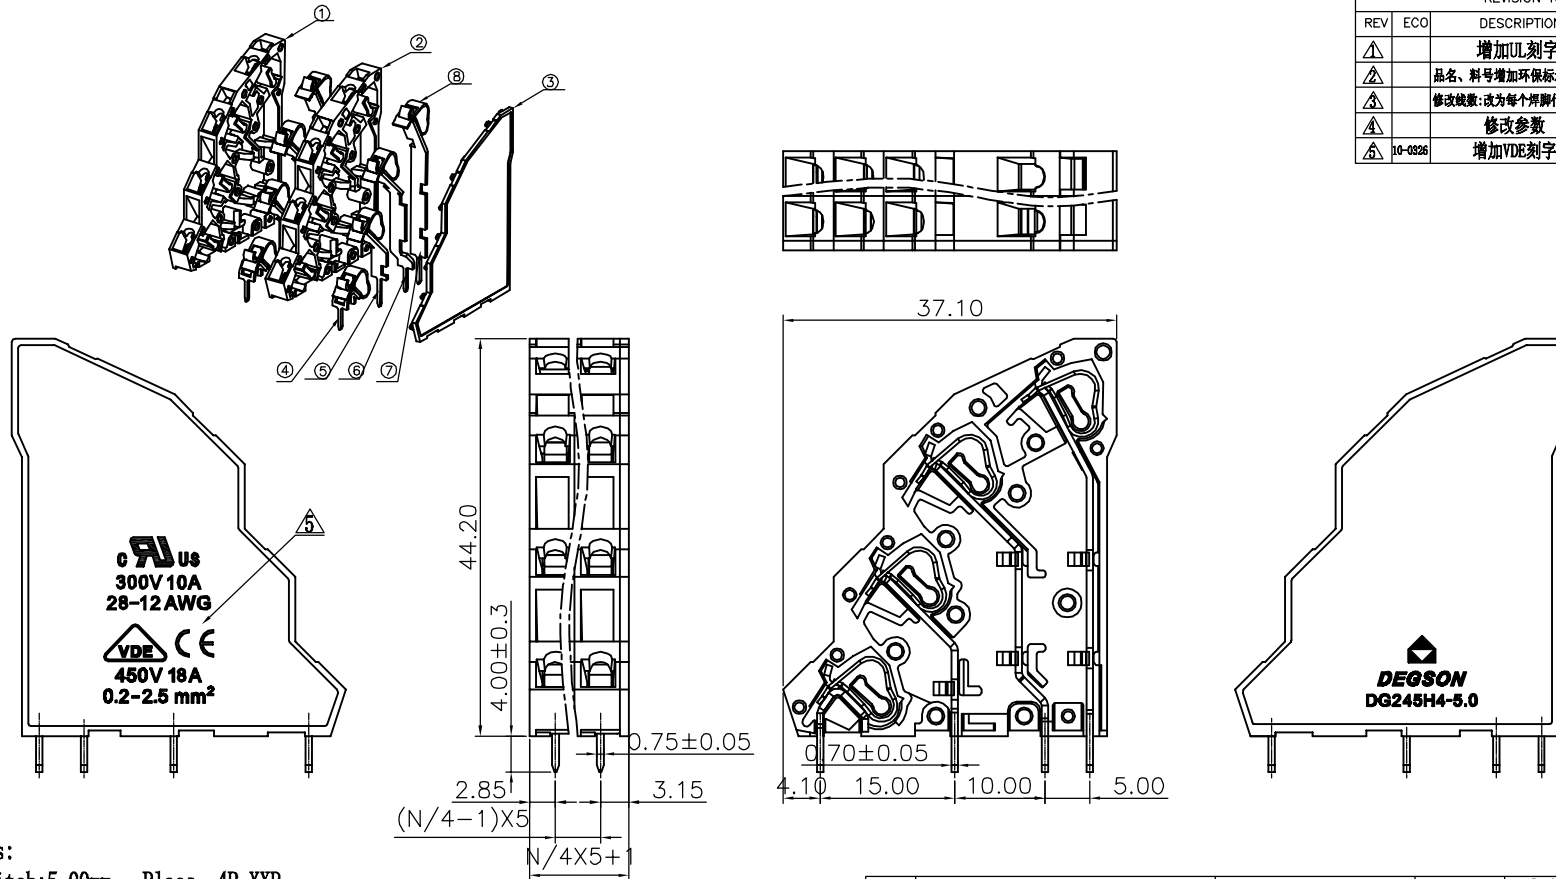

Notes:

1. Pitch: 5.00mm, Ploes: 4P-XXP
2. Rated voltage/current: UL 300V/10A
VDE 450V/18A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC3000V/1min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28~12AWG, 0.2~2.5mm²
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
	over 6	over 10	over 24	over 30	over 60	over 100	over 150	∩	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150	◇	
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
								0.05/10	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
8	DG242 Spring	X00000990 (H)	△	XX	Stainless steel
7	DG245H4-Pin	3032B00010 (H)	△	XX/4	Copper Snce plated
6	DG245H3-Pin	3031B00010 (H)	△	XX/4	Copper Snce plated
5	DG245H2-Pin	3030B00010 (H)	△	XX/4	Copper Snce plated
4	DG245H1-Pin	3025B00020 (H)	△	XX/4	Phosphor bronze Snce plated
3	DG245H4-5.0 Cover	3032C0Y01A (H)	1	PA66	UL94V-0
2	DG245H4-5.0 In-Housing	3032A0Y01A (H)	△	XX/4-1	PA66 UL94V-0
1	DG245H4-5.0 Side-Housing	3032A0Y01B (H)	1	PA66	UL94V-0

DFTO Zhwmw DATE 04/08/06* CHKD DATE INFO DATE APPVL DATE		宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ±		NAME DG245H4-5.0-XXP-1Y-00A(H)	
ANGLES ± 1° G.E : FINISH : SCALE : 1:1		DRAWING NO. DG245H4-5.0-E01 /PART NO. SIZE A3 REV T5 09/30/10*	
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING SHEET 1 OF 1	