
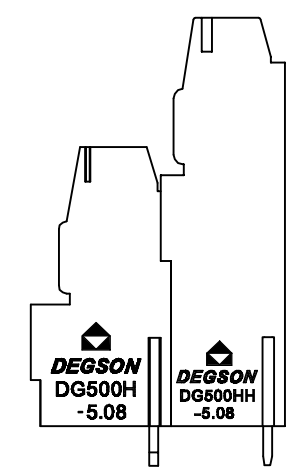
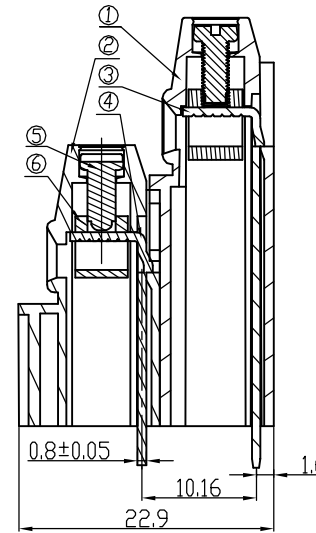


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Heoyh	04/28/08
△		修改线数: 改为每个焊脚代表一线	LJH	03/22/08
△	10-0363	修改技术参数	ZXX	10/28/10

Notes

1. Pitch: 5.08mm , Ploes: XXP
2. Rated voltage/current: UL 300V/20A △  
VDE 250V/24A
3. Operation temperatures: -40° C~+105° C
4. Wrthstanding voltage: AC2000V/1Min
5. Insulation resistance: 5000MΩ/DC1000V
6. Wire range: 28~12AWG, 2.5mm<sup>2</sup> △
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				—
to	over	over	to	over	over	over	—
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

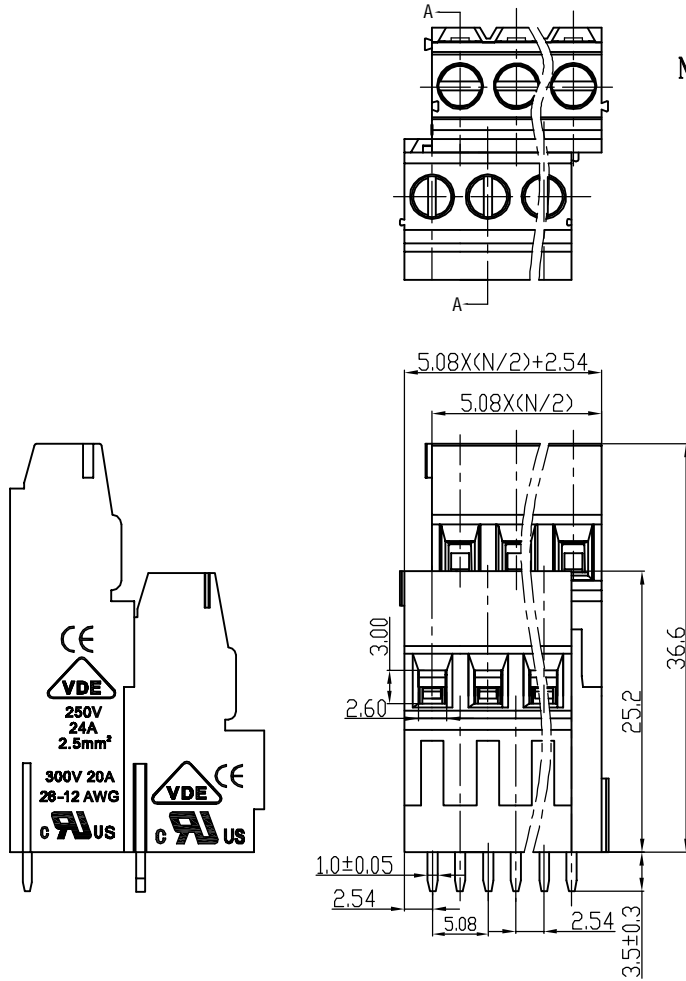

SECTION A-A

ITEM	DESCRIPTION	QTY	UNIT	MATERIAL	FINISH
6	DG128 Wire guard	X00000020	(H)	Brass	Ni plated
5	DG128"-Screws	S000001460	(H)	Steel	Cr <sup>3+</sup> Zn
4	DG500H-Pin header	4038B00010	(H)	Brass	SnCe
3	DG500HH-Pin header	4060B00010	(H)	Brass	SnCe
2	DG500H-5.08-Housing	4038A0Y (XX/2) A (H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG500HH-5.08 Housing (H)	4060A0Y (XX/2) A (H)	1	PA66	UL94V-0

TOLERANCES EXCEPT AS NOTED: MM: .0 ±, .00 ±, .000 ± ANGLES: ± 1° THIRD ANGLE PROJECTION	DFTD HW: DATE 09/23/05* CHKD: DATE MFD: DATE APPVL: DATE MATERIAL: G.E.: FINISH: SCALE: 1:1	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: DG500BB-5.08-XXP-1Y-00A(H) DRAWING NO. DG500BB-5.08-E01 /PART NO. DO NOT SCALE DRAWING	SIZE: A3 REV: T3 10/28/10
--	--	--	---------------------------------