


REVISION RECORD					
REV	ECN	DESCRIPTION	DRFT	DATE	
△	10-0166	增加UL刻字	Lasting	07/16/10'	

Notes:

1. Pitch: 7.5mm, Poles: 1-XXP
2. Rated voltage/current: UL 300V/12A
VDE 250V/24A
3. Operation temperatures: -40°C~+105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 24~14AWG, 0.5~2.5mm²
7. Max. Torque Value: M2.5, 4.08Kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	over	to	over	over	over		
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

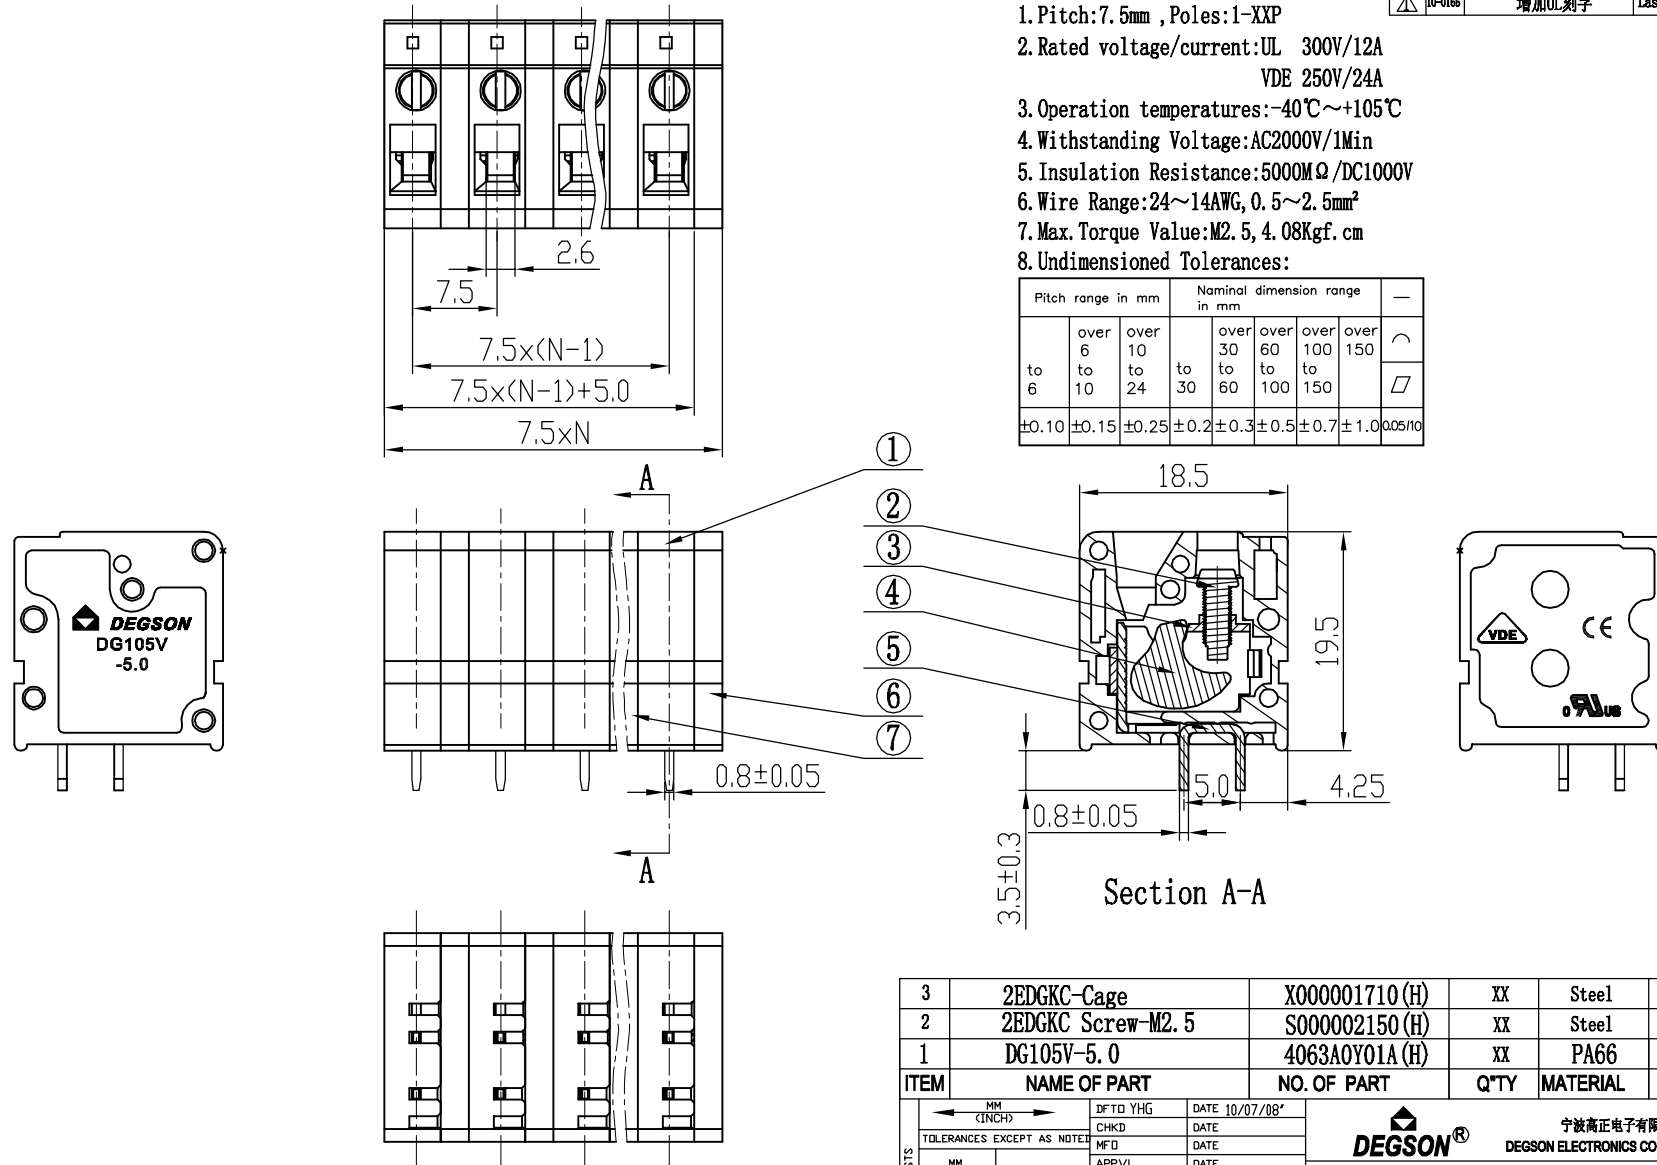

7	DG105V-Calboard	4063HOY01A (H)	XX-1	PA66	UL94V-0
6	DG105V-Cover	4063COY01A (H)	1	PA66	UL94V-0
5	DG105V-5.0-Pin header	4063B00010 (H)	XX	Copper	SnCe plated
4	2EDGKC-Block	X000001720 (H)	XX	Steel	Cr ³⁺ Zn

3	2EDGKC-Cage	X000001710 (H)	XX	Steel	Cr ³⁺ Zn
2	2EDGKC Screw-M2.5	S000002150 (H)	XX	Steel	Cr ³⁺ Zn
1	DG105V-5.0	4063A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 10/07/08'	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
MM	±	CHKD	NAME DG105V-7.5-XXP-1Y-00A (H)		
.0 ±	±	DATE	DRAWING NO. DG105V-7.5-E01		
.00 ±	±	MFD	/PART NO.		
.000 ±	±	DATE	SIZE A3		
ANGLES ± 1°		APPVL	REV T1		
THIRD ANGLE PROJECTION		DATE	07/11/10'		
SCALE: 1:1		MATERIAL:	DO NOT SCALE DRAWING		
		G.E.:	SHEET 1 OF 1		
		FINISH:			