


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		工程变更	Ye j	09/07/07	
△		增加UL、CE刻字	C SX	02/25/08	
△		增加CQC刻字	WLM	01/09/09	
△	10-0315	增加VDE刻字及修改参数	ZXX	09/24/10	

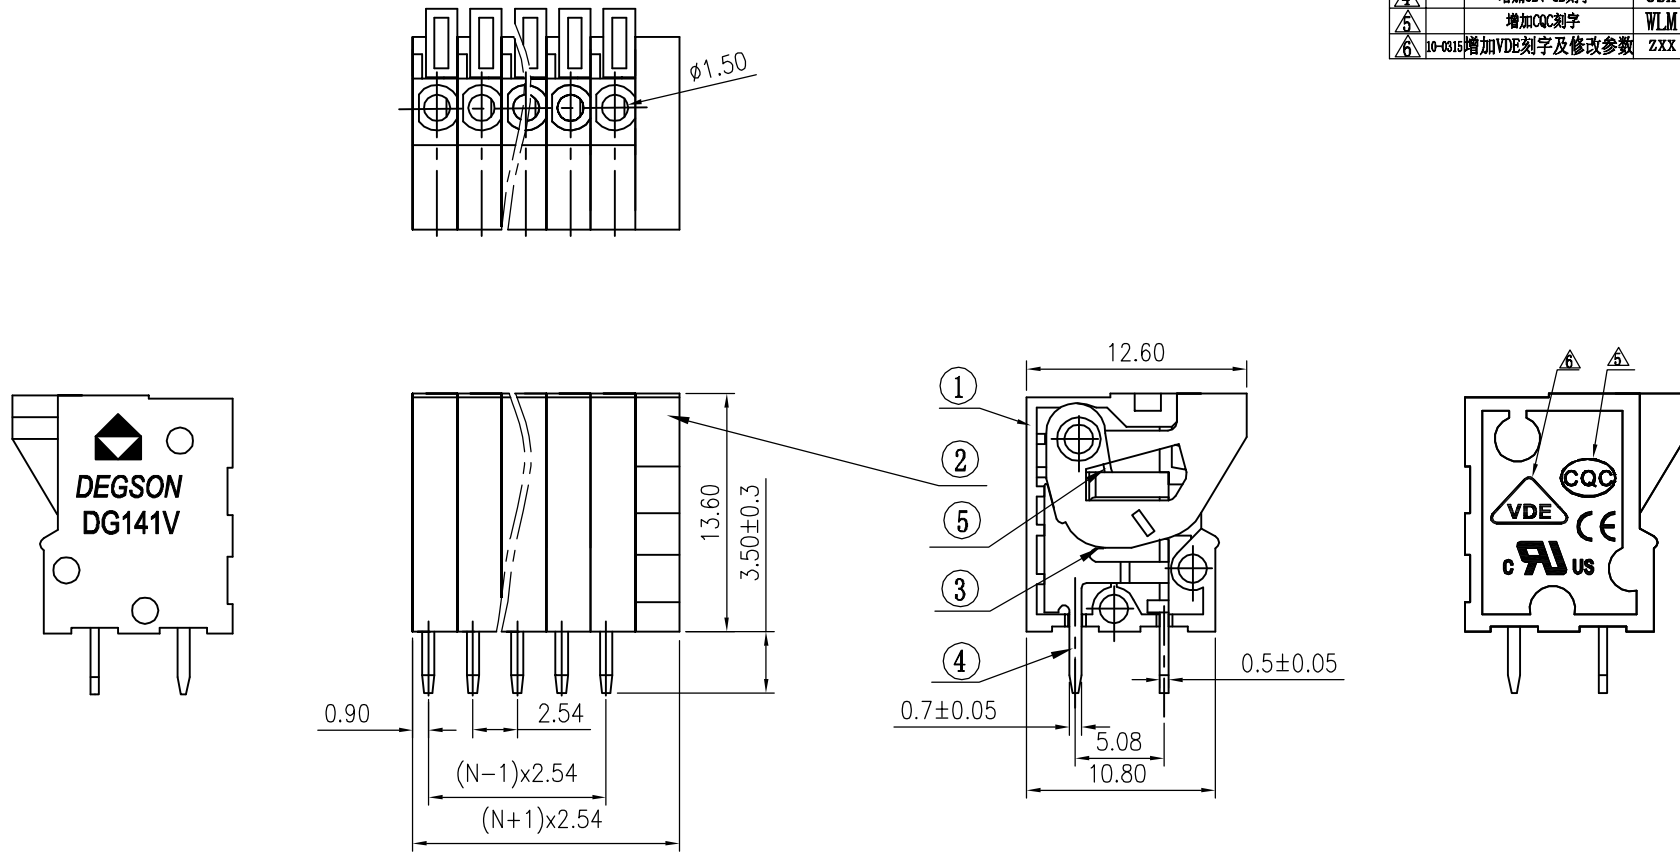

Notes:

1. Pitch:2.54mm , Poles:XXP
2. Rated voltage/current:UL 150V/2A
VDE 130V/6A △
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:24~20AWG, 0.2~1.0mm² △
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm				—
to	over	to	over	over	over	
6	10	30	60	100	150	∩
to 6	to 10	to 30	to 60	to 100	to 150	∇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7
						±1.0

5	DG141 Spring	X00000120 (H)	XX	Stainless Steel	
4	DG141V Pin header	3001B00010 (H)	XX	Brass	SnCe
3	DG141V-Button	3002D0501A (H)	XX	PA66	UL94V-0
2	DG141V-Cover	3002C0Y01A (H)	1	PA66+5%GF △	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG141V-2.54-Housing	3001A0Y01A (H)	XX	PA66+5%GF	UL94V-0

DETAILED LISTS	MM (INCH)	DFTO Home	DATE 01/05/05	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
		MFO	DATE	
		APPVL	DATE	
	MM			NAME
	.0 ±	±		DG141V-2.54-XXP-1Y-00A (H)
	.00 ±	±		DRAWING NO. DG141V-E05
	.000 ±	±		/PART NO.
	ANGLES ± 1°	G.E :		SIZE A3
	THIRD ANGLE PROJECTION	FINISH :		REV T6
		SCALE : 1:1		09/24/10
				DO NOT SCALE DRAWING
				SHEET 1 OF 1