


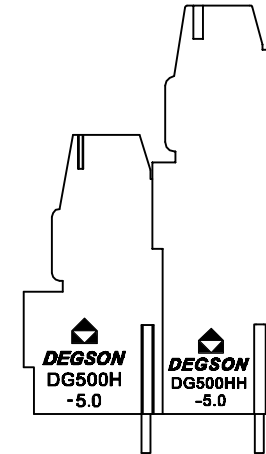
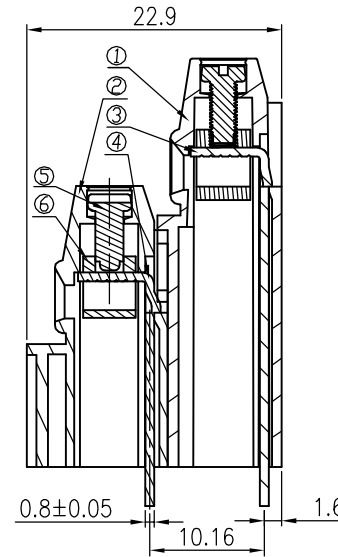


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1	0-0363	修改技术参数	ZXX	10/28/10

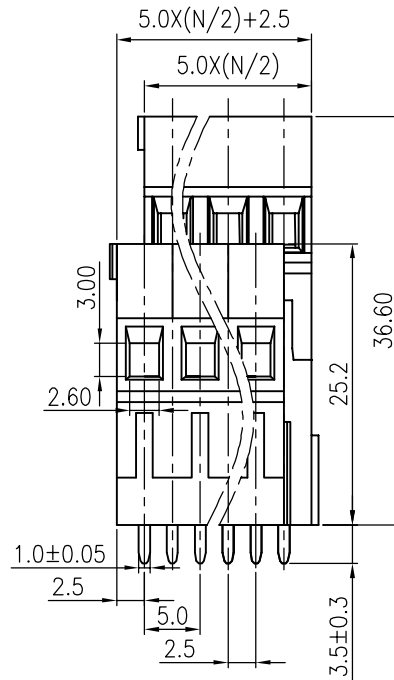

- Notes:
1. Pitch: 5.0mm , Poles: 4-XXP
 2. Rated voltage/current: UL 300V/20A △
VDE 250V/24A
 3. Operation temperatures: -40°C~+105°C
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: 28~12AWG, 2.5mm² △
 7. Max. Torque Value: M2. 5, 4. 08kgf. cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	∩ ◇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

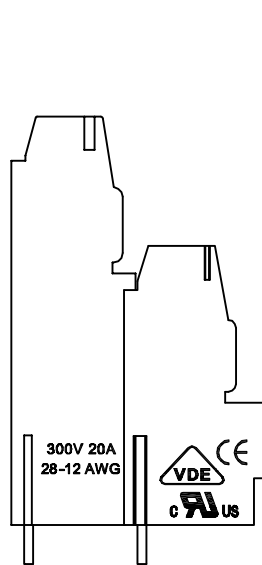

6	DG128 Wire guard	X000000020 (H)	XX	Brass	Ni plated
5	DG128 Screws	S000001460 (H)	XX	Steel	Cr ³⁺ Zn
4	DG500H-Pin header	4038B00010 (H)	XX/2	Brass	SnCe
3	DG500HH-Pin header	4060B00010 (H)	XX/2	Brass	SnCe
2	DG500H-5.0-Housing	4037A0Y (XX/2) A (H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG500HH-5.0 Housing	4059A0Y (XX/2) A (H)	1	PA66	UL94V-0

DETAILED LISTS	MM (INCH)	DFTD L J H	DATE 11/18/08
TOLERANCES EXCEPT AS NOTED		CHKD	DATE
		MFD	DATE
		APPVL	DATE
MM		MATERIAL :	
.0 ±	±	G.E :	
.00 ±	±	FINISH:	
.000 ±	±	SCALE : 1:1	
ANGLES ± 1°		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION		SHEET 1	OF 1

宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
NAME: DG500BB-5.0-XXP-1Y-00A(H)	
DRAWING NO. DG500BB-5.0-E01	SIZE A3
/PART NO.	REV T1 10/28/10