
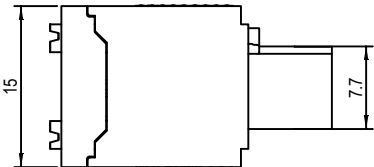






Transfer or duplication of this document as well as the utilization or communication of its contents for marketing or advertising purposes without prior written authorization is prohibited. All rights reserved for patent, utility model or trademark registration. 未经授权复制或传播本文件, 或在本文件基础上进行营销或广告活动, 均属于侵权行为。 未经授权, 不得复制或传播本文件, 或在本文件基础上进行营销或广告活动。

公差/General tolerances(mm)															0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500		
~	~	~	~	~	~	~	~	~	~	~	~	~	~		
3	6	10	18	30	50	80	120	180	250	315	400	500	>500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		

More than 10 poles without raised structure



raised structure position

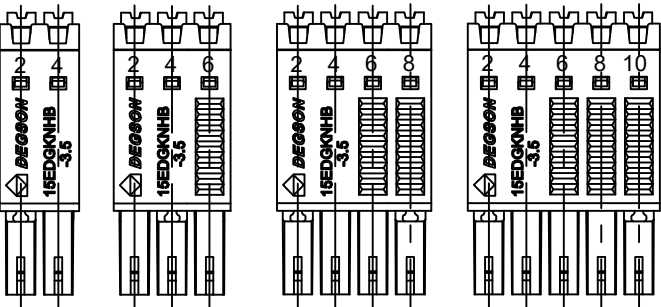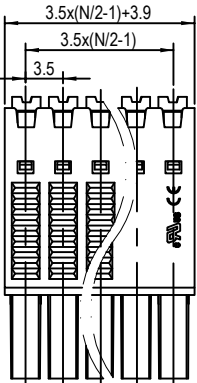

04P 06P 08P 10P

ITEM	NAME OF PART	MATERIAL	NOTES
5	Clamp	Copper alloy	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF%	UL94V-0
2	Cover	PA66+GF%	UL94V-0
1	Housing	PA66+GF%	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		300/10	50/10	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)		160/10	160/10	320/10
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~16 / 0.2~1.5		
间距/Pitch(mm) 线数范围/Poles		3.50/N=04~48P		
剥线长度/Stripping length(mm)		10~11		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

MATERIAL:		SURFACE/COLOR:	
MAT NO./REV:		/ 01.01 MAT STATUS: 批量	
APPR: 兰泰华		NAME	
CHRD: 陈玉华		15EDGKNHB-3.5-XXP-1Y-00A&Z(H)	
DRFT: 陈玉华		DRAWING NO. TYPE	
DATE		200030290 CUSTOMER DRAWING	
REV		DRAWING STATUS	
ECN		已发布	
DESCRIPTION		SCALE	
DRFT		2:1	
DATE		SHEET	
A3		1/1	

03		vize off YDE mark	原进牌	2024.03.06
REV	ECN	DESCRIPTION	DRFT	DATE