D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	csx	03/13/07
2		品名、料号增加环保标识“(H)”	Yej	12/08/07

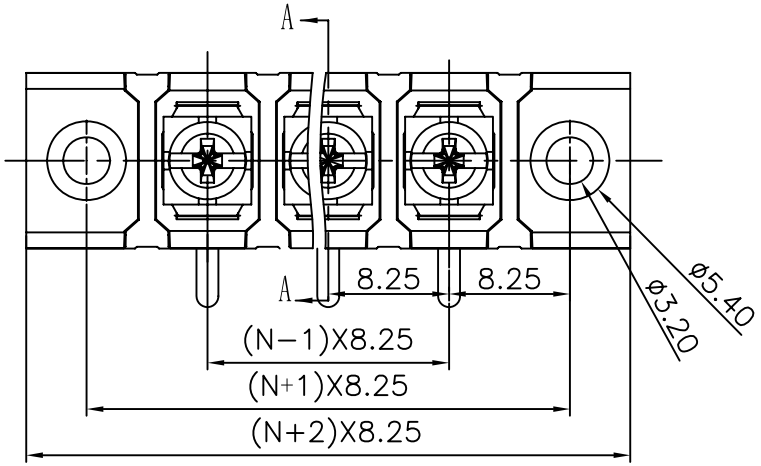

Notes:

1. Pitch:8.25mm ,Poles:2-24P
2. Rated current:15A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/Min
6. Insulation Resistance:500MΩ/DC500V
7. Wire Range:22~14AWG
8. Max.Torque Value:5.1kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

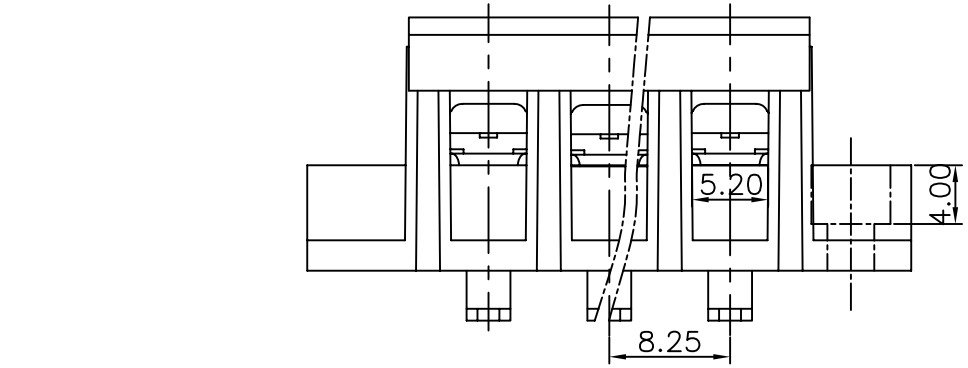

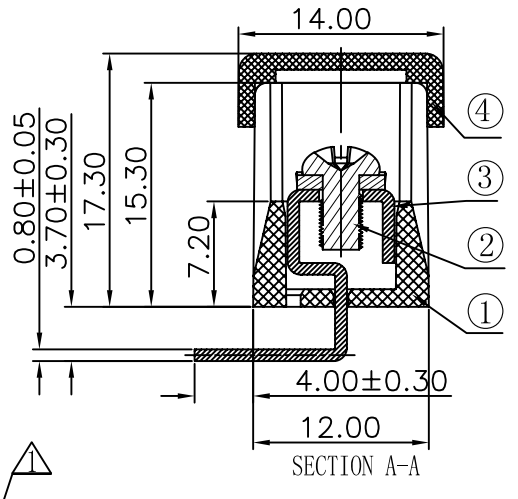

SECTION A-A



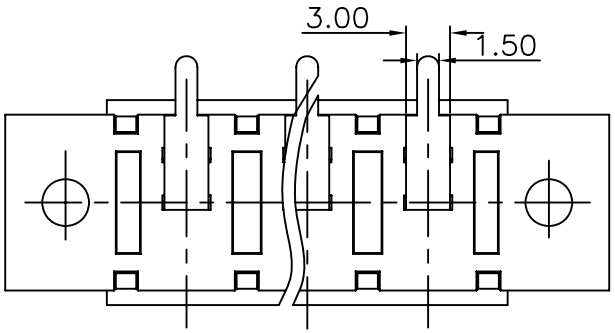



ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	DG38-A housing	5050M0YXXA(H)	1	PA66+23%GF	UL94V-0
4	DG38-Cover	5050C07XXA(H)	1	PC	
3	DG28R Pin header	5006B00070(H)	XX	Brass	SnCe plated
2	M3*6(6*6)bright Screws	S000000450(H)	XX	Steel	Ni plated

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM	
.0 ±	±
.00 ±	±
.000 ±	±

ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTO	Zhuwm	DATE 12/28/"05
CHKD		DATE
MFO		DATE
APPVL		DATE

MATERIAL :

G.E :

FINISH :

SCALE : 1:1

DEGSON®

宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME

DG38R-A-XXP-1Y-00A(H)

DRAWING NO. DG38R-E01

/PART NO.

SIZE A3

REV T2 12/06/07

DO NOT SCALE DRAWING

SHEET 1 OF 1

8 7 6 5 4 3 2 1

H G F E D C B A